


Schwank – Radiant Tube
novoSchwank U

EFFICIENT HEATING AT LOW COST




Schwank
INNOVATIVE HEATING SOLUTIONS




novoSchwank U


novoSchwank 15 U / 20 U

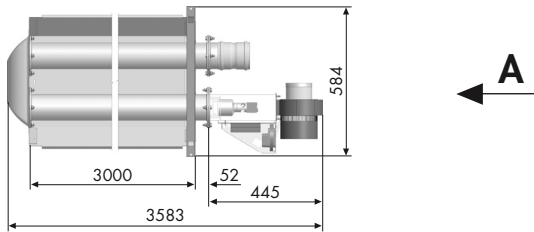


Section




novoSchwank 30 U / 40 U

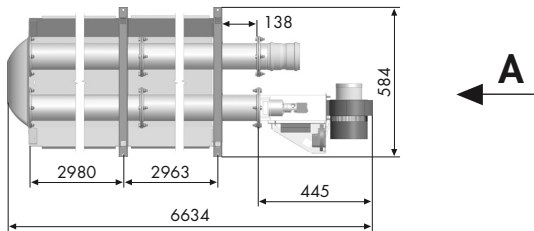

View A



novoSchwank 50 U

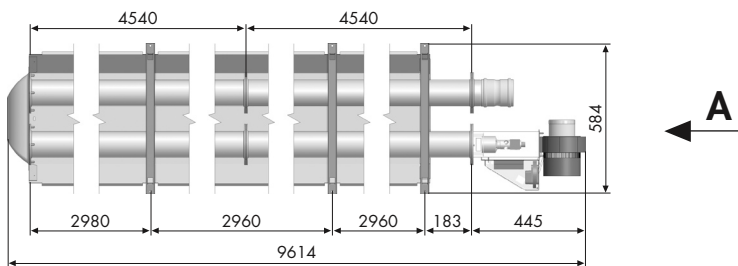

Gas		novoSchwank				
		15 U	20 U	30 U	40 U	50 U
Nat. gas H / G 20 (Hi,n=9,97 kWh/m³)	heat input in kW	16,6	21,1	32,2	43,3	54,3
	gas consumption in m³/h	1,50	1,91	2,91	3,91	4,91
Propane / G 31 (Hi,n=12,87 kWh/kg)	heat input in kW	16,4	20,7	31,5	42,4	53,3
	gas consumption in kg/h	1,17	1,48	2,25	3,03	3,81
	weight in kg	54	54	92	92	132
	air/exhaust connection in mm			Ø 100		
	electrical consumption in W			80		
	electrical protection			IP 20		
	gas connection	R ¹ / ₂ "	R ¹ / ₂ "	R ¹ / ₂ "	R ¹ / ₂ "	R ³ / ₄ "
	electrical supply in V			230 V/ 50 Hz ~		
	ignition and control			spark ignition and ionisation electrode run by automatic controller		
	CE-identification			CE-0085BO0037		

min. connection pressure

Nat. gas H: 15 mbar / Nat. gas L: 20 mbar / Propane: 40 mbar

max. connection pressure

Nat. gas and Propane: 60 mbar